

100-130V

50 a.60Hz

3pol. 4pol. 5pol.
4h 4h 4h

200-250V

50 a.60Hz

3pol. 4pol. 5pol.
6h 9h 9h

345-415V

50 a.60Hz

3pol. 4pol. 5pol.
9h 6h 6h

480-500V

50 a.60Hz

3pol. 4pol. 5pol.
7h 7h 7h

>50-500V


100-300Hz

3pol. 4pol. 5pol.
10h 10h 10h

>50-500V

300-500Hz

3pol. 4pol. 5pol.
2h 2h 2h



IP44



2P+

C013-4



C023-4

電壓


Voltage(V):100-130V~

防護等級

Protection degree: IP44

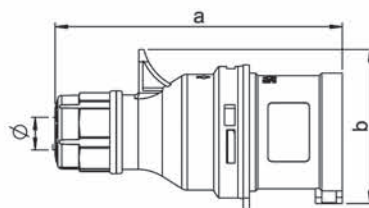

Type	C013-4	C023-4
Rated current(A)	16	32
Dimension(mm)	a	112
	b	55
	c	49.5
	φ	8-14
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6



IP44



2P+

C013



C023

電壓


Voltage(V):200-250V~

防護等級

Protection degree: IP44

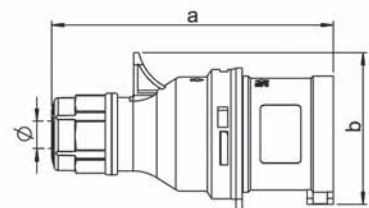

Type	C013	C023
Rated current(A)	16	32
Dimension(mm)	a	112
	b	55
	c	49.5
	φ	8-14
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6



IP44



3P+

C014



C024

電壓


Voltage(V):380-415V~

防護等級

Protection degree: IP44

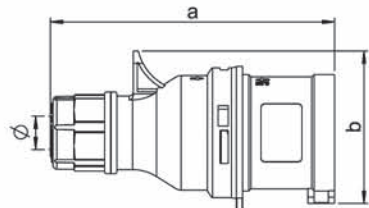

Type	C014	C024
Rated current(A)	16	32
Dimension(mm)	a	116
	b	63
	c	56
	φ	8-14
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6



IP44



3P+N+

C015



C025

電壓


Voltage(V): 200-346V~
240-415V~

防護等級

Protection degree: IP44

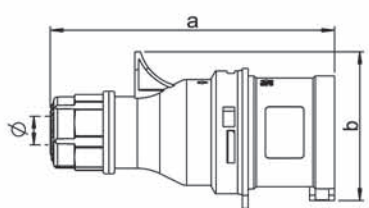

Type	C015	C025
Rated current(A)	16	32
Dimension(mm)	a	125.5
	b	71
	c	63.5
	φ	10-19.5
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6



100-130V

50 a.60Hz

3pol. 4pol. 5pol.
4h 4h 4h

200-250V

50 a.60Hz

3pol. 4pol. 5pol.
6h 9h 9h

346-415V

50 a.60Hz

3pol. 4pol. 5pol.
9h 6h 6h

480-500V

50 a.60Hz

3pol. 4pol. 5pol.
7h 7h 7h

>50-500V


100-300Hz

3pol. 4pol. 5pol.
10h 10h 10h

>50-500V

300-500Hz

3pol. 4pol. 5pol.
2h 2h 2h




IP44




C113-4
C123-4

電壓 Voltage(V):100-130V~
防護等級 Protection degree: IP44



Type	C113-4	C123-4
Rated current(A)	16	32
Dimension(mm)		
a	119.5	147
b	83.5	104
c	74	83
d	58	66
e	34	44
f	10	11
g	5.5	5.5
Ø	8-14	10-19.5
Cable nominal cross-section area(mm²)	1-2.5	2.5-6




IP44




C113
C123

電壓 Voltage(V):200-250V~
防護等級 Protection degree: IP44



Type	C113	C123
Rated current(A)	16	32
Dimension(mm)		
a	119.5	147
b	83.5	104
c	74	83
d	58	66
e	34	44
f	10	11
g	5.5	5.5
Ø	8-14	10-19.5
Cable nominal cross-section area(mm²)	1-2.5	2.5-6




IP44




C114
C124

電壓 Voltage(V):380-415V~
防護等級 Protection degree: IP44



Type	C114	C124
Rated current(A)	16	32
Dimension(mm)		
a	120.5	146.5
b	87.5	99
c	74	83
d	58	66
e	34	44
f	10	11
g	5.5	5.5
Ø	8-14	10-19.5
Cable nominal cross-section area(mm²)	1-2.5	2.5-6




IP44




C115
C125

電壓 Voltage(V): 200-346V~
240-415V~
防護等級 Protection degree: IP44



Type	C115	C125
Rated current(A)	16	32
Dimension(mm)		
a	121	147
b	99	108
c	74	83
d	58	66
e	34	44
f	10	11
g	5.5	5.5
Ø	10-19.5	14-21.5
Cable nominal cross-section area(mm²)	1-2.5	2.5-6



100-130V

50 a.60Hz

3pol. 4pol. 5pol.
4h 4h 4h

200-250V

50 a.60Hz

3pol. 4pol. 5pol.
6h 9h 9h

346-415V

50 a.60Hz

3pol. 4pol. 5pol.
9h 6h 6h

480-500V

50 a.60Hz

3pol. 4pol. 5pol.
7h 7h 7h

>50-500V

100-300Hz

3pol. 4pol. 5pol.
10h 10h 10h

>50-500V

300-500Hz

3pol. 4pol. 5pol.
2h 2h 2h



IP44





C413-4
C423-4

電壓

Voltage(V):100-130V~

防護等級

Protection degree: IP44



Type	C413-4	C423-4
Rated current(A)	16	32
Dimension(mm)	a	72
	b	43
	c	29
	d	53
	e	62
	f	44
	g	68
	h	54
	i	7
	j	3
	k	22
	l	13
Cable nominal cross-section area(mm²)	1-2.5	2.5-6



IP44





C413
C423

電壓

Voltage(V):200-250V~

防護等級

Protection degree: IP44



註:開孔尺寸圖請參考下方

Type	C413	C423
Rated current(A)	16	32
Dimension(mm)	a	72
	b	43
	c	29
	d	53
	e	62
	f	44
	g	68
	h	54
	i	7
	j	3
	k	22
	l	13
Cable nominal cross-section area(mm²)	1-2.5	2.5-6



IP44





C414
C424

電壓

Voltage(V):380-415V~

防護等級

Protection degree: IP44



註:開孔尺寸圖請參考下方

Type	C414	C424
Rated current(A)	16	32
Dimension(mm)	a	75.5
	b	41.5
	c	33
	d	69
	e	72
	f	58
	g	84
	h	68
	i	7
	j	4.5
	k	30
	l	13
Cable nominal cross-section area(mm²)	1-2.5	2.5-6



IP44





C415
C425

電壓

Voltage(V): 200-346V~
240-415V~


防護等級

Protection degree: IP44



註:C425開孔尺寸圖請參考下方

Type	C415	C425
Rated current(A)	16	32
Dimension(mm)	a	75.5
	b	41.5
	c	33
	d	69
	e	72
	f	58
	g	84
	h	68
	i	7
	j	4.5
	k	30
	l	13
Cable nominal cross-section area(mm²)	1-2.5	2.5-6



100-130V

50 a.60Hz

3pol. 4pol. 5pol.
4h 4h 4h

200-250V

50 a.60Hz

3pol. 4pol. 5pol.
6h 9h 9h

346-415V

50 a.60Hz

3pol. 4pol. 5pol.
9h 6h 6h

480-500V

50 a.60Hz

3pol. 4pol. 5pol.
7h 7h 7h

>50-500V


100-300Hz

3pol. 4pol. 5pol.
10h 10h 10h

>50-500V

300-500Hz

3pol. 4pol. 5pol.
2h 2h 2h



IP44




C213-4

電壓 Voltage(V):100-130V~

C223-4

防護等級 Protection degree: IP44

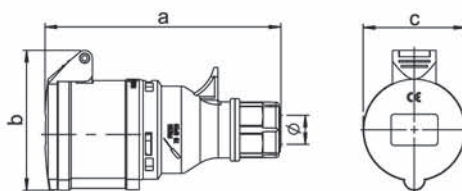

Type	C213-4	C223-4
Rated current(A)	16	32
Dimension(mm)	a	121
	b	69.5
	c	50
	φ	8-14
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6



IP44




C213


電壓 Voltage(V):200-250V~

C223

防護等級 Protection degree: IP44

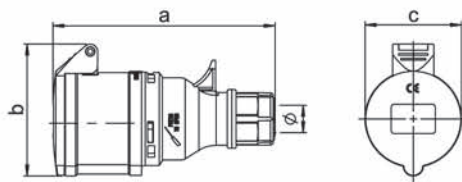

Type	C213	C223
Rated current(A)	16	32
Dimension(mm)	a	121
	b	69.5
	c	50
	φ	8-14
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6



IP44




C214


電壓 Voltage(V):380-415V~

C224

防護等級 Protection degree: IP44

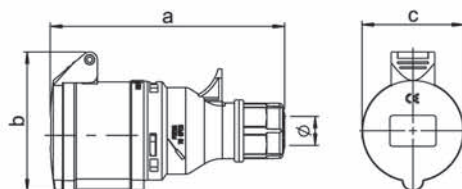

Type	C214	C224
Rated current(A)	16	32
Dimension(mm)	a	125.5
	b	78
	c	56.5
	φ	8-14
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6



IP44




C215

電壓 Voltage(V): 200-346V~
240-415V~



C225

防護等級 Protection degree: IP44


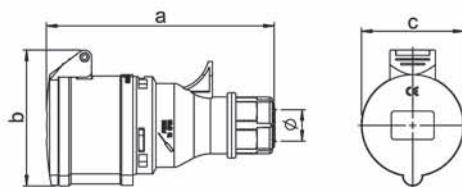


Type	C215	C225
Rated current(A)	16	32
Dimension(mm)	a	132
	b	87
	c	64
	φ	10-19.5
Cable nominal cross-section area(mm ²)	1-2.5	2.5-6



413N#
不適用

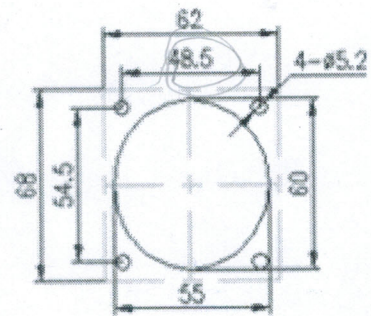



413#

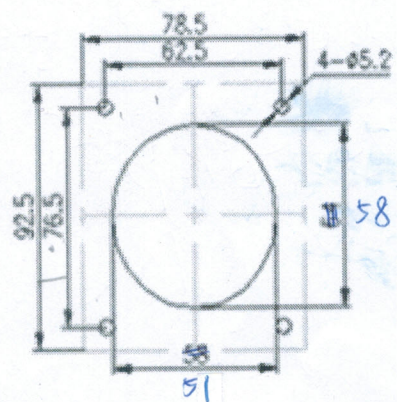



414#

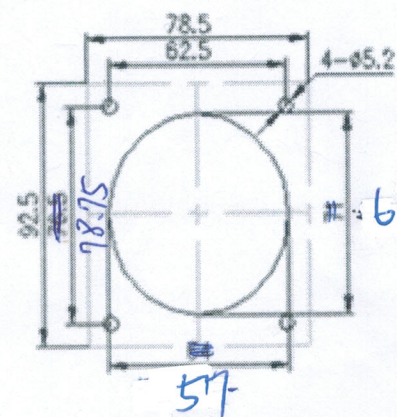



415#
不適用

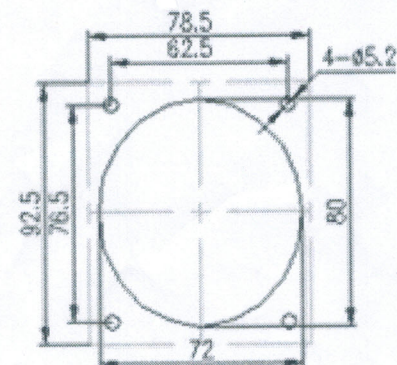



423#

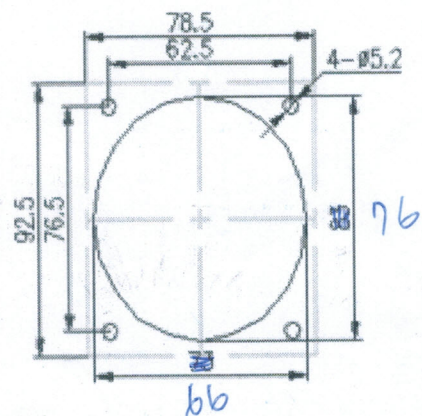

424#

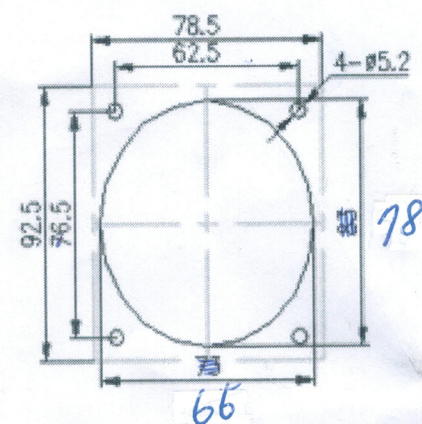


425#

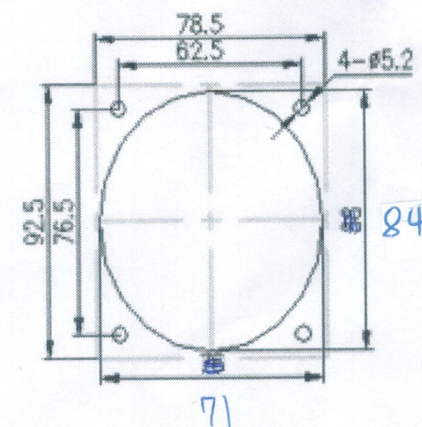

符合IEC60309-1/-2、GB/T11918-11919标准
防护等级：IP67

Conform to IEC60309-1/-2, GB/T11918-11919 standards
IP67 Protection class

名称 NAME	类别 TYPE	电压 VOLTAGE	订货编号 ORDER NO.	颜色 COLOR
	16A 2P+ $\frac{1}{2}$ 三芯 3-wire	110-130V~	0130204	黄色 Yellow
	32A 2P+ $\frac{1}{2}$ 三芯 3-wire	110-130V~	0230204	黄色 Yellow
	16A 2P+ $\frac{1}{2}$ 三芯 3-wire	200-250V~	0130206	蓝色 Blue
	32A 2P+ $\frac{1}{2}$ 三芯 3-wire	200-250V~	0230206	蓝色 Blue
	16A 3P+ $\frac{1}{2}$ 四芯 4-wire	380-415V~	0140206	红色 Red
	32A 3P+ $\frac{1}{2}$ 四芯 4-wire	380-415V~	0240206	红色 Red
	16A 3P+N+ $\frac{1}{2}$ 五芯 5-wire	220-415V~	0150206	红色 Red
	32A 3P+N+ $\frac{1}{2}$ 五芯 5-wire	220-415V~	0250206	红色 Red

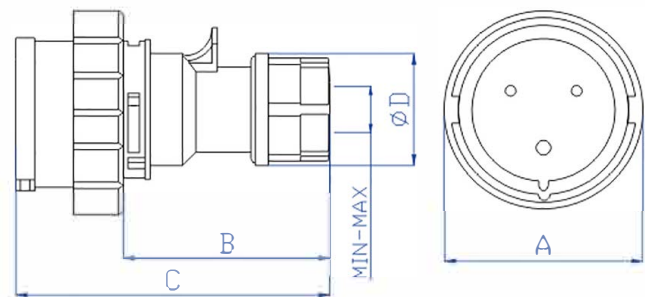


类别 TYPE	尺寸 DIMENSIONS (mm)					
	A	B	C	D	MIN	MAX
16A三芯	70	74	117	42	5.4	14
16A四芯	78.5	82	124	42	5.4	14
16A五芯	86.5	72	124	45.2	6	16.1
32A三芯	93	93	145	54	10.5	20
32A四芯	93	93	145	54	10.5	20
32A五芯	99	102	154	54	10.5	20


符合IEC60309-1/-2、GB/T11918-11919标准
防护等级：IP67

Conform to IEC60309-1/-2, GB/T11918-11919 standards
IP67 Protection class


名称 NAME	类别 TYPE	电压 VOLTAGE	订货编号 16A	订货编号 32A	颜色 COLOR
	插座 Socket	2P+ $\frac{1}{2}$ 三芯 3-wire	1131206	1231206	蓝色 Blue
		3P+ $\frac{1}{2}$ 四芯 4-wire	1141206	1241206	红色 Red
		3P+N+ $\frac{1}{2}$ 五芯 5-wire	1151206	1251206	红色 Red
	连接插座 Movable Socket	2P+ $\frac{1}{2}$ 三芯 3-wire	1132206	1232206	蓝色 Blue
		3P+ $\frac{1}{2}$ 四芯 4-wire	1142206	1242206	红色 Red
		3P+N+ $\frac{1}{2}$ 五芯 5-wire	1152206	1252206	红色 Red
	暗装直插座 Panel Mounting Straight Socket	2P+ $\frac{1}{2}$ 三芯 3-wire	1133206	1233206	蓝色 Blue
		3P+ $\frac{1}{2}$ 四芯 4-wire	1143206	1243206	红色 Red
		3P+N+ $\frac{1}{2}$ 五芯 5-wire	1153206	1253206	红色 Red



类别 TYPE	尺寸 DIMENSIONS (mm)								
	A	B	C	D	E	F	G	H	I
16A三芯	80	86	173	47	70	98	5	61	61
16A四芯	80	86	188	47	70	103	5	61	61
16A五芯	80	86	190	47	70	106	5	61	61
32A三芯	80	86	200	47	70	114	5	61	61
32A四芯	80	86	200	47	70	114	5	61	61
32A五芯	80	86	190	47	70	115	5	61	61

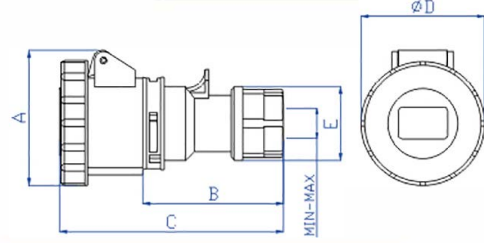

类别 TYPE	尺寸 DIMENSIONS (mm)						
	A	B	C	D	E	MIN	MAX
16A三芯	79	78	132	70	41.5	6	14
16A四芯	84	77	130	79.5	42	6	15
16A五芯	92	82	135	86.5	45.2	6	16
32A三芯	98	99	165	93	54	10	20
32A四芯	98	87	149	93	54	10	20
32A五芯	102	93	158	99	54	10	22



类别 TYPE	尺寸 DIMENSIONS (mm)									
	A	B	C	D	E	F	G	H	I	J
16A三芯	76	57	78	10	75	21	33	60	55	5.5
16A四芯	76	63	84	10	75	21	33	60	52	5.5
16A五芯	76	63	92	10	75	21	33	60	52	5.5
32A三芯	76	73	96	10	75	22	33	60	52	5.5
32A四芯	76	73	96	10	75	22	33	60	52	5.5
32A五芯	76	67	102	10	75	22	33	60	52	5.5

符合IEC60309-1/-2、GB/T11918-11919标准
防护等级：IP67

Conform to IEC60309-1/-2, GB/T11918-11919 standards
IP67 Protection class

名称 NAME	类别 TYPE	电压 VOLTAGE	订货编号 63A	ORDER NO. 125A	颜色 COLOR
	63/125A 插头 Plug	2P+ $\frac{1}{2}$ 三芯 3-wire	0330206	0430206	蓝色 Blue
		3P+ $\frac{1}{2}$ 四芯 4-wire	0340206	0440206	红色 Red
		3P+N+ $\frac{1}{2}$ 五芯 5-wire	0350206	0450206	红色 Red
	63/125A 明装插头 Surface Mounting Plug	2P+ $\frac{1}{2}$ 三芯 3-wire	0335206	0435206	蓝色 Blue
		3P+ $\frac{1}{2}$ 四芯 4-wire	0345206	0445206	红色 Red
		3P+N+ $\frac{1}{2}$ 五芯 5-wire	0355206	0455206	红色 Red
	63/125A 装置直插头 Panel Mounting Straight Plug	2P+ $\frac{1}{2}$ 三芯 3-wire	0336206	0436206	蓝色 Blue
		3P+ $\frac{1}{2}$ 四芯 4-wire	0346206	0446206	红色 Red
		3P+N+ $\frac{1}{2}$ 五芯 5-wire	0356206	0456206	红色 Red

类 别 TYPE	尺寸 DIMENSIONS (mm)						
	A	B	C	D	E	F	G
63A三芯	230	76	75	64	56	8	10
63A四芯	230	76	75	64	56	8	10
63A五芯	230	76	75	64	56	8	10
125A三芯	297	85	88	80	61	10	12
125A四芯	297	85	88	80	61	10	12
125A五芯	297	85	88	80	61	10	12

类 别 TYPE	尺寸 DIMENSIONS (mm)								
	A	B	C	D	E	F	G	H	I
63A三芯	122	110	307	159	109	126	6	80	80
63A四芯	122	110	307	159	109	126	6	80	80
63A五芯	122	110	307	159	109	126	6	80	80
125A三芯	142	135	350	187	130	145	6	100	100
125A四芯	142	135	350	187	130	145	6	100	100
125A五芯	142	135	350	187	130	145	6	100	100

类 别 TYPE	尺寸 DIMENSIONS (mm)						
	A	B	C	D	E	F	G
63A三芯	100	128	80	75	26	10	6.5
63A四芯	100	128	80	75	26	10	6.5
63A五芯	100	128	80	75	26	10	6.5
125A三芯	120	149	100	100	36	10	6.5
125A四芯	120	149	100	100	36	10	6.5
125A五芯	120	149	100	100	36	10	6.5

符合IEC60309-1/-2、GB/T11918-11919标准
防护等级：IP67

Conform to IEC60309-1/-2, GB/T11918-11919 standards
IP67 Protection class

名称 NAME	类别 TYPE	电压 VOLTAGE	订货编号 63A	ORDER NO. 125A	颜色 COLOR
	63/125A 插座 Socket	2P+ $\frac{1}{2}$ 三芯 3-wire	1331206	1431206	蓝色 Blue
		3P+ $\frac{1}{2}$ 四芯 4-wire	1341206	1441206	红色 Red
		3P+N+ $\frac{1}{2}$ 五芯 5-wire	1351206	1451206	红色 Red
	63/125A 连接插座 Movable Socket	2P+ $\frac{1}{2}$ 三芯 3-wire	1332206	1432206	蓝色 Blue
		3P+ $\frac{1}{2}$ 四芯 4-wire	1342206	1442206	红色 Red
		3P+N+ $\frac{1}{2}$ 五芯 5-wire	1352206	1452206	红色 Red
	63/125A 暗装直插座 Panel Mounting Straight Socket	2P+ $\frac{1}{2}$ 三芯 3-wire	1333206	1433206	蓝色 Blue
		3P+ $\frac{1}{2}$ 四芯 4-wire	1343206	1443206	红色 Red
		3P+N+ $\frac{1}{2}$ 五芯 5-wire	1353206	1453206	红色 Red

类 别 TYPE	尺寸 DIMENSIONS (mm)					
	A	B	C	D	E	F
63A三芯	298	125	109	109	195	158
63A四芯	298	125	109	109	195	158
63A五芯	298	125	109	109	195	158
125A三芯	350	146	130	135	220	187
125A四芯	350	146	130	135	220	187
125A五芯	350	146	130	135	220	187

类 别 TYPE	尺寸 DIMENSIONS (mm)						
	A	B	C	D	E	MIN	MAX
63A三芯	112	158	240	108.2	65	15	37
63A四芯	112	158	240	108.2	65	15	37
63A五芯	112	158	240	108.2	65	15	37
125A三芯	128	213	305	122	80	25	49
125A四芯	128	213	305	122	80	25	49
125A五芯	128	213	305	122	80	25	49

类 别 TYPE	尺寸 DIMENSIONS (mm)									
	A	B	C	D	E	F	G	H	I	J
63A三芯	140	82	112	98	98	78	98	48	70	6.5
63A四芯	140	82	112	98	98	78	98	48	70	6.5
63A五芯	140	82	112	98	98	78	98	48	70	6.5
125A三芯	158	88	131	120	120	100	120	48	89	6.5
125A四芯	158	88	131	120	120	100	120	48	89	6.5
125A五芯	158	88	131	120	120	100	120	48	89	6.5